



OSPREY PLATFORM BUILDING AND INSTALLATION

- We use a 2' X 2' 3/4" marine plywood for the platform.
- Pressure treated 2" x 2" framing overlaps the plywood to serve as a perch and a place to tie the nest into.
- 2" x 2" cross pieces in each corner for stability and uprights in the corners to hold nest materials.
- A 1-1/2" galvanized floor flange and a 21' galvanized pipe (1-1/2' inside diameter). Both pipe and floor flange can be purchased at any Shore Distributors.
- We use a jet pump to install the pipe into the bottom of the creek, river or pond.
- We also recommend using galvanized nails.



2" x 2" upright
in each corner

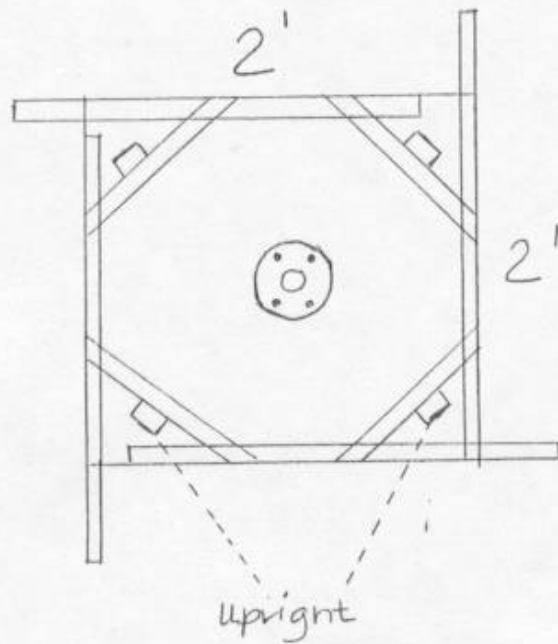